

CAMO[®]

The Better Way to Build a Deck

2025

PRODUCT CATALOG



THE BETTER WAY TO BUILD A DECK.

FASTENING SYSTEMS



CLIPDRIVE™

STAND-UP DECK CLIP FASTENING SYSTEM

The Better Way to Fasten CAMO Universal Deck Clips.

PAGES 6-7

FOR USE WITH CAMO UNIVERSAL DECK CLIPS



NEVER-MISS GUIDE

DECK CLIP FASTENING SYSTEM

Included in 450 ct and 900 ct pails of CAMO Universal Deck Clips.

PAGES 8-9

FOR USE WITH CAMO UNIVERSAL DECK CLIPS



DRIVE

STAND-UP 3-IN-1 FASTENING SYSTEM

Save time with the award-winning CAMO DRIVE® tool.

PAGES 10-11

FOR USE WITH CAMO COLLATED EDGE + FACE SCREWS OR CAMO UNIVERSAL DECK CLIPS






MARKSMAN

HIDDEN EDGE SCREW FASTENING SYSTEM

Achieve a fastener-free surface on square edge decking.

PAGES 16-17

FOR USE WITH CAMO EDGE SCREWS



ACCESSORIES

DECK TAPE

SELF-ADHESIVE LINED BUTYL TAPE



PAGES 24-25



BLOCK

THE BETTER FLOATING FOUNDATION
PAGES 22-23



PAGES 26-27

ACCESSORIES



FASTENERS FOR EVERY PROJECT

SYSTEM FASTENERS

For exclusive use with CAMO® systems



CAMO EDGE SCREWS



CAMO COLLATED EDGE + FACE SCREWS

CAMO UNIVERSAL DECK CLIPS



EXTERIOR FASTENERS

For Deck, Composite, Trim, or Structural connections.

BUGLEHEAD DECK



COUNTERSINKING DECK



COMPOSITE



TRIM



How many fasteners does my deck project need?



Scan here for the CAMO Fastener Calculator.

CODE-COMPLIANT STRUCTURAL SCREWS

IRC/IBC
CODE-COMPLIANT



TRUSS



MULTI-PLY + LEDGER FLAT HEAD SCREWS



FRAMING SCREWS



MULTI-PURPOSE FLAT HEAD SCREWS



MULTI-PURPOSE HEX HEAD HDG SCREWS



MULTI-PURPOSE HEX HEAD SCREWS



STAINLESS STEEL



305 & 316 COMPOSITE SCREWS



316 JOIST HANGER NAILS
(COLLATED AVAILABLE)



305 & 316 DECK SCREWS



316 RING SHANK DECK NAILS
(COLLATED AVAILABLE)



WEDGE 316SS



316 PAINTED TRIM SCREWS



305, 316 & 410 BLACK TRIM SCREWS



316 EDGE SCREWS

CONTENTS

| | |
|-------------------------------------|----|
| DRIVE SYSTEMS | 6 |
| CLIPDRIVE | 6 |
| UNIVERSAL DECK CLIPS | 8 |
| DRIVE | 10 |
| COLLATED SCREWS | 12 |
| DRIVE SYSTEM ACCESSORIES | 14 |
| MARKSMAN SYSTEM | 16 |
| MARKSMAN TOOLS | 16 |
| EDGE SCREWS | 18 |
| MARKSMAN ACCESSORIES | 20 |
| BLOCK | 22 |
| DECK TAPE | 24 |
| LEVER | 26 |
| EXTERIOR FASTENERS | 28 |
| DECK | 29 |
| COMPOSITE | 32 |
| TRIM | 35 |
| STRUCTURAL | 40 |
| EXTERIOR ACCESSORIES | 48 |
| STAINLESS STEEL FASTENERS | 50 |
| UNIVERSAL DECK CLIPS | 51 |
| DECK SCREWS | 52 |
| COMPOSITE SCREWS | 54 |
| EDGE SCREWS | 56 |
| TRIM SCREWS | 57 |
| BITS | 60 |
| HAND DRIVE NAILS | 61 |
| COLLATED NAILS | 62 |
| COATINGS INFORMATION | 64 |
| FASTENER & TOOL SELECTOR | 66 |


COUNTERSINKING HEAD
Sits flush for a finished look

REVERSE UPPER THREADS
For strong hold down power

PROTECH COATED
To resist corrosion from the elements

COUNTERSINKING DECK SCREW

We've broadened our Deck Screw lineup with a new, countersinking workhorse. Featuring reverse upper threads for even greater hold down power, this does-it-all Countersinking Deck Screw is one you'll keep coming back to.

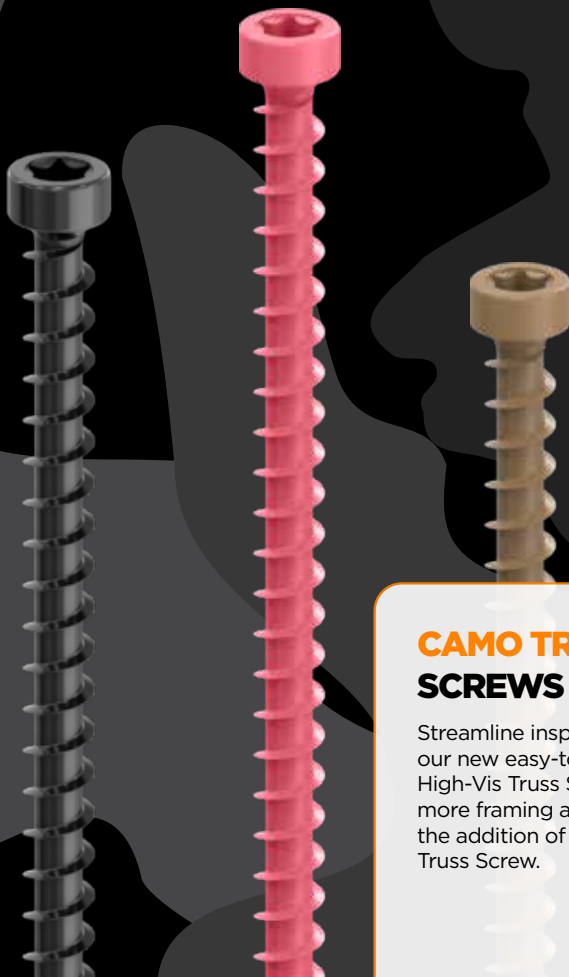

CAMO TRUSS SCREWS

Streamline inspections with our new easy-to-spot pink 6" High-Vis Truss Screw. Secure more framing applications with the addition of our black 4.5" Truss Screw.



WEDGE CLIPS

WedgeClip™ - the faster, easier, BETTER way to fasten deck boards. The patented WedgeClip™ design fits snugly in the grooves of deck boards with a strong hold for an easy one-pass, one-handed installation.

CAMO®

NEW FOR 2025

CAMO's spirit of innovation runs through everything we do. Not content with "good enough," we invent tools and fasteners to help builders get the job done easier, faster, better - for the pro deck builders and remodelers alike.

We look to those in the field and learn from real-world experiences to drive our innovation and new products pipeline, which is why we're introducing for 2025 a new Countersinking Deck Screw that is sure to become a staple of for every CAMO user for decking projects and beyond. And a new 6" High Vis Truss Screw has been added to the lineup to keep the work moving, making jobsite inspections faster and simpler. Look for new black 4.5" Truss screws, black Trim Screws, and black Composite Screws in the line-up growing application support and expanding the available color match options.

Whether you're building a deck, or taking on home builds, or renovations, CAMO has the tools and fasteners you need to get it done right.

CAMOFASTENERS.COM





CLIPDRIVE™

STAND UP FASTENING TOOL FOR CAMO® UNIVERSAL DECK CLIPS

The Better Way to Fasten CAMO Universal Deck Clips.


Stand tall, target screws easily, and drive clips up to 5X faster with CAMO ClipDRIVE, the contractor-grade tool designed to give you the best experience fastening grooved decking.

STAND-UP DECK CLIP FASTENING SYSTEM



TOOL

(p. 7)



FASTENERS

(p. 8-9)



ClipDRIVE™

- Install grooved decking up to 5X faster
- For use with CAMO Universal Deck Clips on leading grooved deck boards
- Attaches to your drill, features an adjustable handle, and has a weighted nose for easy screw targeting
- Ergonomically designed to be easy on the body and reduce fatigue on the job
- CAMO Universal Deck Clips and the ClipDRIVE are backed by a CAMO Warranty





| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|-----|------------|
| 0345065 | ClipDRIVE | 1 | 1 |

FASTEN WITH THE ClipDRIVE


BUILD YOUR DECK UP TO 5X FASTER USING CAMO LEVER, CLIPS AND ClipDRIVE TOGETHER.

(p.26)

CLIP



Use CAMO Universal Deck Clips (p. 8-9)

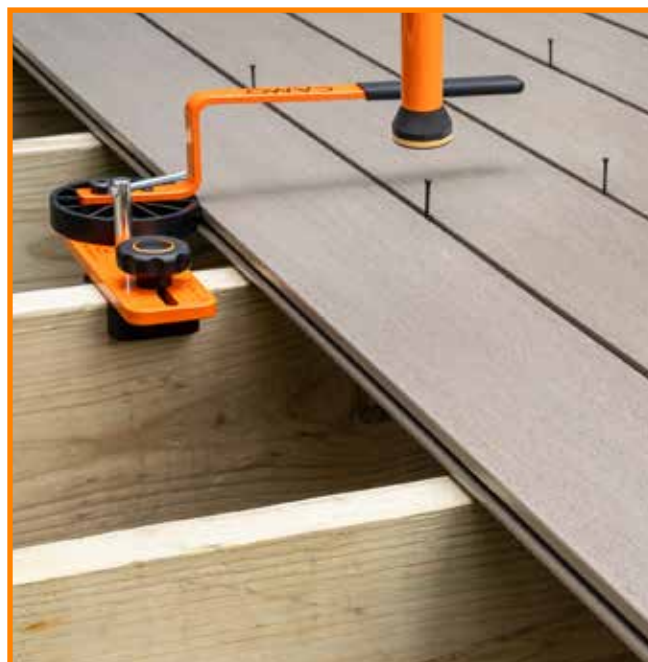




UNIVERSAL DECK CLIPS

CAMO deck clips make installing grooved decking on wood or metal joists easy for everyone.

These hidden deck clips are designed and warranted for use with leading grooved deck boards and result in a beautiful fastener-free surface that you can install in half the time of other hidden fasteners. Fasten EDGE[®], WEDGECLIP[™], and WEDGEMETAL[®] Clips by hand with the NEVER-MISS[®] Guide or standing up with ClipDRIVE[™] and DRIVE.

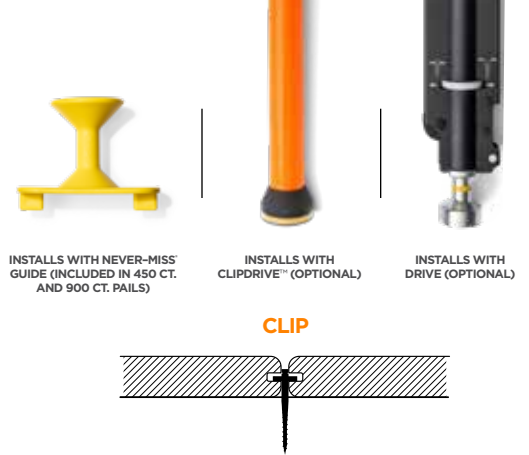

INSTALLS WITH NEVER-MISS[®] GUIDE (INCLUDED IN 450 CT. AND 900 CT. PAILS)

INSTALLS WITH CLIPDRIVE[™] (OPTIONAL)

INSTALLS WITH DRIVE (OPTIONAL)

STARTER

- Secure the first and last board to achieve a completely fastener-free deck surface on wood joists
- Designed for use with leading grooved deck boards
- Screw tip bites into joist quickly
- Versatile clip can also be used as an L-bracket
- 304 stainless steel clip and 304 stainless steel screw



| SKU# | DESCRIPTION | COVERAGE | QTY | DRIVER BIT | CT./MASTER |
|---------|--------------------------------|--------------------|-----|------------|------------|
| 0344087 | STARTER Clip - For Wood Joists | 30 lineal ft (9 m) | 25 | -- | 6 |



EDGE®

- 90° deck patterns on wood joists
- One-pass fasteners—clip sits in place on the joist until you're ready to fasten
- Clip creates 3/16 in (4.7 mm) spacing
- Gusset holds boards down
- Fasten with included* NEVER-MISS® Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE
- 305 stainless gusset, 305 stainless screw, nylon plastic spacer body



*Included in 450 ct and 900 ct pails

| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|---|-----|----------------------------------|------------|------------|
| 0344354 | EDGE Clip - 90° Deck Pattern on Wood Joists | 90 | 50 sq ft (4.64 m ²) | 1 - T-15 | 4 |
| 0344359 | | 450 | 250 sq ft (23.2 m ²) | 2 - T-15 | 1 |
| 0344356 | | 900 | 500 sq ft (46.4 m ²) | 2 - T-15 | 1 |



WEDGECLIP™

- Any deck pattern on wood joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Use with grooved composite, PVC and hardwood boards
- Clip body creates 3/16 in (4.7 mm) spacing
- Gusset holds boards down
- 316 stainless gusset, 316 stainless screw, nylon plastic spacer body
- Fasten with included *NEVER-MISS® Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE.



*Included in 450 ct and 900 ct pails

| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--|-----|-----------------------------------|------------|------------|
| 0344654S | WEDGE Clip - Any Deck Pattern on Wood Joists | 90 | 50 sq ft (4.64 m ²) | 1 - T-15 | 8 |
| 0344659S | | 450 | 250 sq ft (23.22 m ²) | 2 - T-15 | 1 |
| 0344656S | | 900 | 500 sq ft (46.45 m ²) | 2 - T-15 | 1 |

WEDGEMETAL®

- Any deck pattern on 14-18GA metal joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Use with grooved composite, PVC and hardwood boards
- Clip body creates 3/16 in (4.7 mm) spacing
- Gusset holds boards down
- 305 stainless gusset, 410 stainless drill point screw, nylon plastic spacer body
- Fasten with included *NEVER-MISS® Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE.



*Included in 450 ct and 900 ct pails

| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|--|-----|-----------------------------------|------------|------------|
| 0344674 | WEDGEMETAL Clip - Any Deck Pattern on Metal Joists | 90 | 50 sq ft (4.64 m ²) | 1 - T-15 | 8 |
| 0344679 | | 450 | 250 sq ft (23.22 m ²) | 2 - T-15 | 1 |
| 0344676 | | 900 | 500 sq ft (46.4 m ²) | 2 - T-15 | 1 |




CAMO DRIVE[®]

STAND UP FASTENING TOOL FOR CAMO COLLATED EDGE SCREWS, FACE SCREWS AND DECK CLIPS

Stand up, save your back and knees, and save your time with the award-winning CAMO DRIVE[®] tool.

Fasten square and grooved deck boards with the CAMO DRIVE tool, featuring three interchangeable nose pieces to install Collated Edge and Face Screws and CAMO Universal Deck Clips.

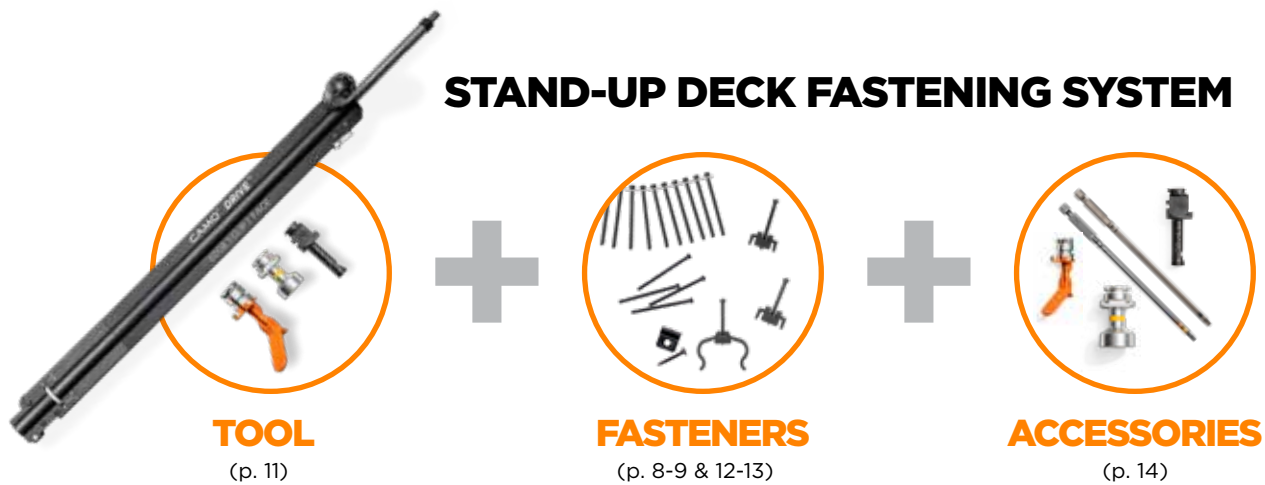




CAMO DRIVE®

- Attaches to your drill
- Use with CAMO Collated Edge Screws, Collated Face Screws, and CAMO Universal Deck Clips
- Fasten square® pressure treated, KDAT, cedar, redwood, composite, PVC, and grooved deck boards
- Easy to use, featuring a reversible handle and quick-change nose pieces
- Stand-up fastening allows for fast installations that are easy on the body



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|-----|------------|
| 0345060 | DRIVE | 1 | 1 |

THREE WAYS TO FASTEN WITH DRIVE

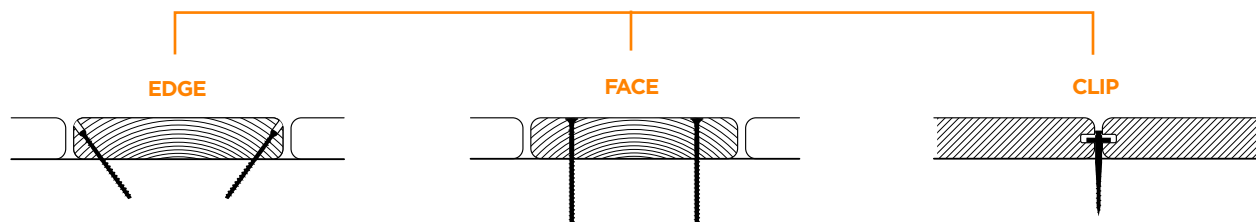

Use the Edge nose piece with CAMO Collated Edge Screws (p. 12)



Use the Face nose piece with CAMO Collated Face Screws (p. 12)



Use the Clip nose piece with CAMO Universal Deck Clips (p. 8-9)

*For most square decking installs, we recommend using secondary spacers to allow for expansion, contraction, and drainage.



COLLATED SCREWS


CAMO Collated screws are exclusively designed for use with the DRIVE tool.

Each fastener was intentionally created and collated for peak performance in its given application. Collated screws are available in 1000 ct. quantities, which cover 285 sq ft (26.48 m²) and come with their corresponding driver bits: T-15 for Edge Screws and T-20 for Face Screws.




FOR EXCLUSIVE USE WITH DRIVE TOOL


EDGE



FACE



FOR USE WITH T-15 BIT + EDGE NOSE PIECE

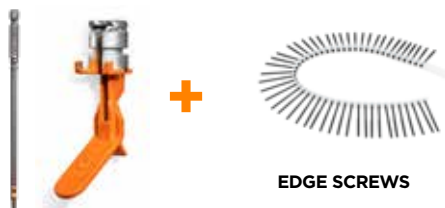

EDGE SCREWS

FOR USE WITH T-20 BIT + FACE NOSE PIECE



FACE SCREWS FOR PRESSURE TREATED AND COMPOSITE



COLLATED EDGE SCREWS (WOOD, NON-CAPPED COMPOSITE AND PVC)

- For use with DRIVE and Edge nose piece (orange)
- 2-3/8 in (60.3 mm) screw secures 1-1-1/2 in (25.4-38.1 mm) thick pressure treated, cedar, redwood, uncapped composite, and PVC deck boards
- Rake tip augers material out reducing splitting and cracking, trimhead reduces visibility
- T-15 Star Drive limits cam-outs



| SKU# | DESCRIPTION | COATING/ALLOY | SIZE | QTY | DRIVER BIT | CT/MASTER |
|----------|--------------------------------|---------------------|--------------------|------|------------|-----------|
| 0395010 | Collated Edge Screws for DRIVE | PROTECH® | 2-3/8 in (60.3 mm) | 1000 | 2 - T-15 | 1 |
| 0395020S | | 316 Stainless Steel | 2-3/8 in (60.3 mm) | 1000 | 2 - T-15 | 1 |



COLLATED FACE SCREWS (PRESSURE TREATED)

- For use with DRIVE and Face nose piece (black)
- 3 in (76.2 mm) screw secures pressure treated boards up to 1-1/2 in (38.1 mm) thick
- Rake tip augers material out, reducing splitting, and buglehead draws the board tight
- T-20 Star Drive limits cam-outs



| SKU# | DESCRIPTION | COLOR | SIZE | QTY | DRIVER BIT | CT/MASTER |
|---------|--|-------|----------------------|------|------------|-----------|
| 0395040 | Collated Wood Face Screws for DRIVE - PROTECH® | Green | 3 in x #10 (76.2 mm) | 1000 | 2 - T-20 | 1 |
| 0395042 | | Tan | 3 in x #10 (76.2 mm) | 1000 | 2 - T-20 | 1 |
| 0395047 | | Red | 3 in x #10 (76.2 mm) | 1000 | 2 - T-20 | 1 |



COLLATED FACE SCREWS (COMPOSITE, CAPPED-COMPOSITE AND PVC)

- For use with DRIVE and Face nose piece (black)
- 2-1/2 in (63.5 mm) screw secures 1 in (25.4 mm) thick composite and PVC deck boards
- Slash point drives quickly, cutting lead edge creates a flush finish
- T-20 Star Drive limits cam-outs



COLOR MATCHER

Use the color matcher on camofasteners.com to find the right color for your board.



| SKU# | DESCRIPTION | COLOR | SIZE | QTY | DRIVER BIT | CT/MASTER |
|---------|---|--------|--------------------------|------|------------|-----------|
| 0395050 | Collated Composite Face Screws for DRIVE - PROTECH® | Brown | 2-1/2 in x #10 (63.5 mm) | 1000 | 2 - T-20 | 1 |
| 0395060 | | Gray | 2-1/2 in x #10 (63.5 mm) | 1000 | 2 - T-20 | 1 |
| 0395070 | | Tan | 2-1/2 in x #10 (63.5 mm) | 1000 | 2 - T-20 | 1 |
| 0395080 | Collated Composite Face Screws for DRIVE- 305 Stainless Steel | Bright | 2-1/2 in x #10 (63.5 mm) | 1000 | 2 - T-20 | 1 |

DRIVE SYSTEM ACCESSORIES

Driver bits are engineered specifically for use with the CAMO DRIVE[®] and ClipDRIVE[™] tools. The bits engage quickly and easily with the screw heads with reduced cam-outs, and are color-coded with a band for quick identification—orange and yellow for Edge and Clip fastening, black for Face fastening.

T-15 BIT



- For use with CAMO DRIVE for Edge or Clip fastening and the CAMO ClipDRIVE
- 6.25 in (160 mm) long
- T-15 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|----------------------|------|------------|
| 0395715 | T-15 Bit Replacement | 2/pk | 4 |

T-20 BIT



- For use with CAMO DRIVE for Face fastening
- 6.25 in (160 mm) long
- T-20 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|----------------------|------|------------|
| 0395720 | T-20 Bit Replacement | 2/pk | 4 |

NOSE PIECES



- Replacement nose pieces for use with CAMO DRIVE
- Edge (orange) for fastening Collated Edge Screws
- Clip (yellow-banded silver) for fastening Universal Deck Clips
- Face (black) for fastening Collated Composite and Wood Face Screws



| SKU# | DESCRIPTION | QTY |
|---------|-----------------------------|-----|
| 0395801 | Replacement Edge Nose Piece | 1 |
| 0395805 | Replacement Clip Nose Piece | 1 |
| 0395803 | Replacement Face Nose Piece | 1 |






MARKSMAN[®] SYSTEM

Achieve a fastener-free surface on square edge decking with this easy and affordable hidden fastening system.

MARKSMAN Tools automatically establish spacing between boards and direct CAMO Edge Screws into the edge of the board, leaving a smooth deck surface. Plus, the MARKSMAN System is backed by a CAMO warranty for use in leading deck boards.



HIDDEN FASTENER SYSTEM



TOOLS

p. 17



FASTENERS

p. 18-19



ACCESSORIES

p. 20



MARKSMAN PRO®

- For use with CAMO Edge Screws on square edge composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT deck boards
- Fits most 5-¼ in (133 mm) to 5-¾ in (146 mm) boards
- Creates 3/16 in (4.7 mm) spacing



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|--------------|-----|------------|
| 0345001 | MARKSMAN Pro | 1 | 6 |



MARKSMAN PRO®-X1

- For use with CAMO Edge Screws on pressure treated deck boards
- Fits most 5-¼ in (133 mm) to 5-¾ in (146 mm) boards
- Creates 1/16 in (1.59 mm) spacing



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------------|-----|------------|
| 0345002 | MARKSMAN Pro - X1 | 1 | 6 |



MARKSMAN PRO®-NB

- For use with CAMO Edge Screws on square edge composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT narrow deck boards
- Fits most 3-¼ in (83 mm) to 5 in (127 mm) boards
- Creates 3/16 in (4.7 mm) spacing



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------------|-----|------------|
| 0345015 | MARKSMAN Pro - NB | 1 | 6 |



MARKSMAN® EDGE

- For use with CAMO Edge Screws on pressure treated deck boards
- Single-shot tool attaches to your drill
- Tool leaves no spacing between boards




| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------|-----|------------|
| 0345020 | MARKSMAN Edge | 1 | 3 |



EDGE SCREWS

The Best Deck Screws You'll Never See.

CAMO Edge Screws are an innovative, easy-to-install hidden fastener that delivers a high-end look at an affordable price. They are for exclusive use with MARKSMAN PRO[®] tools. Edge Screws feature a patented rake tip that augers material out as you drive to reduce board splitting and a trimhead to reduce visibility. They are available in CAMO's proprietary PROTECH coating and 316 Stainless Steel.



PROTECH[®] COATED

PROTECH is our coating that is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements.



316 STAINLESS STEEL MARINE GRADE

316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas like structures that are near saltwater, or that will be exposed to harsh chemicals like chlorine, wood strippers, or ice melt.

| DECK BOARD MATERIAL | RECOMMENDED CAMO EDGE SCREW |
|-------------------------------|--|
| Pressure Treated Lumber | Stainless Steel or PROTECH Coated |
| Composite | Stainless Steel or PROTECH Coated |
| Capped Composite | Stainless Steel or PROTECH Coated (with partial pre-drill method) |
| PVC | Stainless Steel Required |
| Cedar | Stainless Steel Required |
| Redwood | Stainless Steel Required |
| Hardwood or Imported Hardwood | Stainless Steel Required (with partial pre-drill method) |

EDGE SCREWS

- For use with all square edge deck boards, including pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Features a patented rake tip that augers material out as they're driven, reducing the potential for splitting and cracking*
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws

- Trimhead reduces visibility on the edge of the board
- Available in PROTECH coating and 316 Stainless Steel



*Pre-drilling is required for hardwoods and capped composites

PROTECH[®] COATED



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|-------------------------|------|-----------------------------------|------------|------------|
| 0345120 | 1-7/8 in (47.6 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | -- | 12 |
| 0345128 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-15 | 12 |
| 0345124 | | 700 | 200 sq ft (18.58 m ²) | 2 - T-15 | 4 |
| 0345119 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-15 | 4 |
| 0345140 | 2-3/8 in (60.3 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | -- | 12 |
| 0345148 | | 350 | 100 sq ft (9.29m ²) | 1 - T-15 | 12 |
| 0345144 | | 700 | 200 sq ft (18.58 m ²) | 2 - T-15 | 4 |
| 0345139 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-15 | 4 |

316 STAINLESS STEEL MARINE GRADE



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|-------------------------|------|-----------------------------------|------------|------------|
| 0345220S | 1-7/8 in (47.6 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | -- | 12 |
| 0345228S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-15 | 12 |
| 0345224S | | 700 | 200 sq ft (18.58 m ²) | 2 - T-15 | 4 |
| 0345219S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-15 | 1 |
| 0345240S | 2-3/8 in (60.3 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | -- | 12 |
| 0345248S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-15 | 12 |
| 0345244S | | 700 | 200 sq ft (18.58 m ²) | 2 - T-15 | 4 |
| 0345239S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-15 | 1 |

MARKSMAN[®] ACCESSORIES

Driver Bits are engineered specifically for use with CAMO Edge Screws and MARKSMAN Pro[®] tools. The built-in shoulder sets automatic depth of drive for maximum holding power, and prevents over-driving the screw.

DRIVER BITS SQUARE BOARDS



- For use with MARKSMAN Pro[®] tools and Edge Screws
- 3 in (76.2 mm) long
- T-15 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|------|------------|
| 0345099 | Driver Bit | 2/pk | 10 |

DRIVER BITS GROOVED BOARDS



- For use with MARKSMAN Pro[®] tools and Edge Screws
- 3 in (76.2 mm) long
- T-15 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|------------------------------|------|------------|
| 0345089 | Driver Bit for Grooved Board | 2/pk | 10 |

PRE-DRILL BITS



- For use with MARKSMAN Pro[®] tools
- Pre-drilling is required for capped composite and hardwood
- 3-5/8 in (92 mm) long



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------|------|------------|
| 0345035 | Pre-Drill Bit | 2/pk | 10 |






CAMO BLOCK[®]

THE BETTER FLOATING FOUNDATION




Build a better freestanding deck from the ground up. If you're building a freestanding deck 5½ in to 30 in tall, there's no better solution than CAMO BLOCK[®].



- Lightweight - 18x lighter than cement footings - each BLOCK only weighs 2.16lb.
- Load rated to support 1800 lb, making them stronger than cement footings
- Made from recycled material and can be recycled when it's at the end of its life
- Comes with a 30-year warranty, will not chip, crack, or corrode, and is vented to prevent water build-up, rot, and mold.
- Easy to install and transport



| SKU# | DESCRIPTION | WEIGHT | LOAD | QTY | CT./MASTER |
|---------|-------------|---------|---------|-----|------------|
| 0420001 | BLOCK | 2.16 lb | 1800 lb | 1 | 20 |

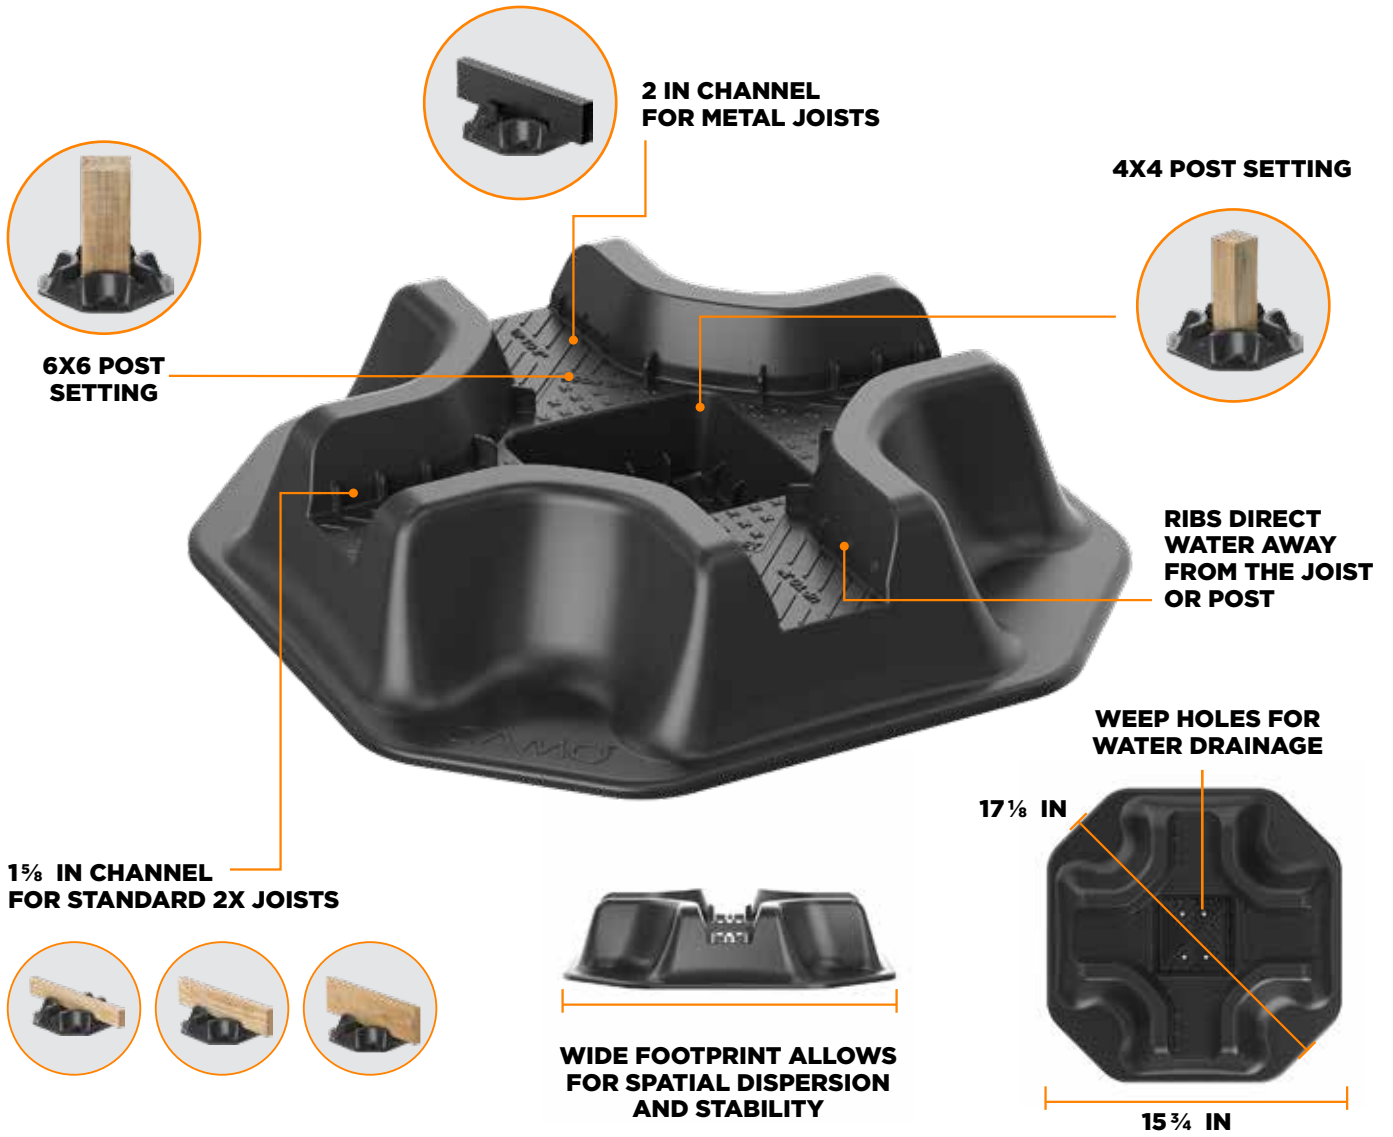

USE BLOCK FOR VARIOUS PROJECTS

LOW-PROFILE + ROOFTOP DECKS



LANDINGS



VARIABLE-HEIGHT DECKS



SHEDS



RAISED DECKS



DOG HOUSES



INTERMEDIARY FOOTINGS



WALKWAYS





JOIST + LEDGER DECK TAPE

SELF-ADHESIVE LINED BUTYL TAPE

Protect and extend the life of your deck with CAMO Joist + Ledger Deck tape, made in the USA.



- Self Adhesive butyl tape creates a waterproof membrane to protect wood deck framing
- Self seals around fasteners, blocking the pathway of water into wood
- Extends the life of your deck
- Securely bonds to wood framing
- One roll covers approximately 75 square feet of deck framing.

| SKU# | DESCRIPTION | LENGTH | QTY | CT./MASTER |
|---------|-----------------------------------|--------|-----|------------|
| 0375010 | 1 5/8 in Joist + Ledger Deck Tape | 65 ft | 1 | 16 |
| 0375030 | 3 1/8 in Joist + Ledger Deck Tape | 65 ft | 1 | 8 |
| 0375060 | 6 in Joist + Ledger Deck Tape | 65 ft | 1 | 8 |

BETWEEN JOIST HANGERS AND LEDGER BOARD



BETWEEN FRAMING AND JOIST HANGERS



LEDGER BOARD



TOP OF JOISTS



TOP OF DOUBLE JOISTS



BETWEEN RIM JOISTS AND FASCIA



SIZE-SPECIFIC APPLICATIONS



1 5/8 in width
Fully covers tops
of 2x wood joists



3 7/8 in width
For use with
double joists



6 in width
Ideal for ledger
and rim joists




CAMO LEVER[®]

BOARD BENDING AND LOCKING TOOL

Build a better deck by yourself with LEVER, the one-turn tool that locks-in rows of boards and clips and straightens warped boards.



- Speeds up grooved deck installs—locks-in rows of boards and clips before fastening
- Strong enough to straighten any warped board
- Easily adjusts to wood and metal joists 1-1/2 to 3 in wide for jobsite versatility
- Multi-directional lever locks in one turn



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|-----|------------|
| 0345070 | LEVER | 1 | 4 |



LOCKS BOARDS & CLIPS

Use 2-4 LEVER tools across the length of the deck for the best clip installation experience with consistent spacing.

BENDS WARPED BOARDS

One LEVER is strong enough to straighten out warped pressure treated and hardwood boards in one turn.



ANY JOIST MATERIAL

Works on wood and metal joists



ANY JOIST WIDTH

Adjusts to joists 1-½ to 3 in wide



ANY BOARD TYPE

Straightens and locks any board at any angle

ONE TOOL FOR EVERY JOB









EXTERIOR FASTENERS

CAMO offers a high-quality line of exterior fasteners that deliver on reliability no matter the project.

CAMO fasteners start fast, hold strong, and create long-lasting connections. Our fasteners are coated with high-performance exterior-grade coatings, and can be used on interior projects as well. Our comprehensive line includes Deck, Composite, Trim, and code-compliant Structural screws along with a line of marine-grade Stainless Steel fasteners. Make CAMO your one-stop shop for all your performance screw needs.

RECOMMENDED APPLICATIONS FOR EACH SCREW TYPE

|  DECK |  COMPOSITE |  TRIM |  NAILS |  CODE-COMPLIANT STRUCTURAL |
|---|--|--|--|--|
| <ul style="list-style-type: none"> • Wood decking projects • Fences • Any exterior wood-to-wood connection <p>(p. 29-30)</p> | <ul style="list-style-type: none"> • Composite decking projects • PVC decking projects <p>(p. 31-33)</p> | <ul style="list-style-type: none"> • Wood and PVC Decking • Exterior trim • Deck rails • Balusters • Fences <p>(p. 34-37)</p> | <ul style="list-style-type: none"> • Wood patios • Wood decks • Other exterior wood to wood connections in corrosive environments <p>(p. 59-60)</p> |  <ul style="list-style-type: none"> • Truss • Multi-Ply • Multi-Ply + Ledger • Framing • Multi-Purpose <p>(p. 38-45)</p> |

CAMO Exterior Fasteners also for Interior use

STAINLESS STEEL

CAMO offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments.

305 STAINLESS STEEL

Great corrosion resistance for most inland exterior projects.

316SS MARINE GRADE

Best corrosion resistance for projects in highly corrosive environments.

DECK SCREWS

- For any wood-to-wood connection
- Type 17 slash point starts fast and reduces splitting
- Star Drive provides more points of contact, reducing cam-outs
- Available in green and tan PROTECH coating to blend into wood surfaces, and 305 Stainless Steel and 316 Stainless Steel for maximum corrosion resistance

PROTECH® COATED Deck Screws



| GREEN SKU# | TAN SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|------------|----------|-------------------------|------|-----------------------------------|------------|------------|
| 0341070 | 0356070 | 1-¼ in (31.8 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 |
| 0341074 | 0356074 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 |
| 0341100 | 0356100 | 1-5/8 in (41.3 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 |
| 0341104 | 0356104 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 |
| 0341109 | 0356109 | | 1750 | 500 sq ft (46.45m ²) | 2 - T-20 | 1 |
| 0341130 | 0356130 | 2 in (50.8 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 |
| 0341134 | 0356134 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 |
| 0341139 | 0356139 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 |
| 0341150 | 0356150 | 2-½ in (63.5 mm) x #9 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0341154 | 0356154 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0341159 | 0356159 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0341170 | 0356170 | 3 in (76.2 mm) x #9 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0341174 | 0356174 | | 350 | 100 sq ft (9.29m ²) | 1 - T-25 | 4 |
| 0341179 | 0356179 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0341190 | 0356190 | 3-½ in (88.9 mm) x #10 | 50 | 15 sq ft (1.39 m ²) | 1 - T-25 | 12 |
| 0341194 | 0356194 | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 4 |
| 0341199 | 0356199 | | 1350 | 385 sq ft (35.77 m ²) | 2 - T-25 | 1 |
| 0341200 | 0356200 | 4 in (101.6 mm) x #10 | 50 | 15 sq ft (1.39 m ²) | 1 - T-25 | 12 |
| 0341204 | 0356204 | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 4 |
| 0341209 | 0356209 | | 1350 | 385 sq ft (35.77 m ²) | 2 - T-25 | 1 |
| 0341220 | 0356220 | 5 in (127 mm) x #12 | 30 | 9 sq ft (0.84 m ²) | 1 - T-25 | 10 |
| 0341224 | 0356224 | | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 4 |
| 0341229 | 0356229 | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 1 |
| 0341240 | 0356240 | 6 in (152.4 mm) x #12 | 30 | 9 sq ft (0.84 m ²) | 1 - T-25 | 10 |
| 0341244 | 0356224 | | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 4 |
| 0341249 | 0356249 | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 1 |

For more information on coatings, go to pg. 64

COUNTERSINKING

Deck Screws



PROTECH® COATED
TAN

- For a premium finish on wood deck boards and other wood-to-wood connections
- Type 17 slash point reduces splitting
- Countersinking head creates a clean, flush finish
- T-25 star drive reduces stripping
- Reverse upper threads provide strong hold down power



NEW

| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|-------------------------|------|-----------------------------------|------------|------------|
| 0376070 | 1-¼ in (31.8 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0376074 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0376100 | 1-5⁄8 in (41.3 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0376104 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0376109 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0376130 | 2 in (50.8 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0376134 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0376139 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0376150 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0376154 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0376159 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0376170 | 3 in (76.2 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0376174 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0376179 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0376190 | 3-½ in (88.9 mm) x #10 | 50 | 15 sq ft (1.39 m ²) | 1 - T-25 | 12 |
| 0376194 | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 4 |
| 0376197 | | 1350 | 385 sq ft (35.77 m ²) | 2 - T-25 | 1 |
| 0376200 | 4 in (101.6 mm) x #10 | 50 | 15 sq ft (1.39 m ²) | 1 - T-25 | 12 |
| 0376204 | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 4 |
| 0376209 | | 1350 | 385 sq ft (35.77 m ²) | 2 - T-25 | 1 |

For more information on coatings, go to pg. 64

305 STAINLESS STEEL

Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--------------------------|------|-----------------------------------|------------|------------|
| 0348100 | 1-5/8 in (41.3 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348104 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348109 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348130 | 2 in (50.8 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348134 | | 350 | 100 sq ft (9.29m ²) | 1 - T-25 | 4 |
| 0348139* | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348150 | 2-1/2 in (63.5 mm) x #10 | 100 | 30 sq ft (2.79m ²) | 1 - T-25 | 12 |
| 0348154 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348159 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348170 | 3 in (76.2 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348174 | | 350 | 100 sq ft (9.29m ²) | 1 - T-25 | 4 |
| 0348179 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348190 | 3-1/2 in (88.9 mm) x #10 | 50 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348194 | | 250 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348199 | | 1350 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348200 | 4 in (101.6 mm) x #10 | 50 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348204 | | 250 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348209 | | 1350 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |

316 STAINLESS STEEL MARINE GRADE

Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--------------------------|------|-----------------------------------|------------|------------|
| 0348100S | 1-5/8 in (41.3 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348104S | | 350 | 100 sq ft (9.29m ²) | 1 - T-25 | 4 |
| 0348130S | 2 in (50.8 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348134S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348139S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348150S | 2-1/2 in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348154S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348159S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348170S | 3 in (76.2 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348174S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348179S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348190S | 3-1/2 in (88.9 mm) x #10 | 50 | 15 sq ft (1.39 m ²) | 1 - T-25 | 12 |
| 0348194S | | 250 | 70 sq ft (6.5 m ²) | 1 - T-25 | 4 |
| 0348199S | | 1350 | 385 sq ft (35.77 m ²) | 2 - T-25 | 1 |

For more information on coatings, go to pg. 64

COMPOSITE SCREWS

- Color-matched screws for composite and PVC decking projects
- Double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming
- Reverse thread at top increases pull-down power while cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in PROTECH coating and 316 Stainless Steel for maximum corrosion resistance



COLOR MATCHER

Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

PROTECH® COATED Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR |
|---------|------------------------|------|-----------------------------------|------------|------------|------------|
| 0349250 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Brown |
| 0349254 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349259 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349350 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Cedar |
| 0349354 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349359 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349050 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Dark Brown |
| 0349054 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349059 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |

For more information on coatings, go to pg. 64

PROTECH® COATED
Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR |
|----------|------------------------|------|-----------------------------------|------------|------------|------------|
| 0349450 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Gray |
| 0349454 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349459 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349550 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Redwood |
| 0349554 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349559 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349750 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Sand |
| 0349754 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349759 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349950 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Stone Gray |
| 0349954 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349959 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349150 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Tan |
| 0349154 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349159 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349850 | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Winchester |
| 0349854 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349859 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |
| 0349000G | 2-½ in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-20 | 12 | Dark Gray |
| 0349004G | | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | |
| 0349009G | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | |

For more information on coatings, go to pg. 64

316 STAINLESS STEEL MARINE GRADE

Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|------------------------|------|-----------------------------------|------------|------------|------------|--|
| 0367158BS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Brown | |
| 0367159BS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158CS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Cedar | |
| 0367159CS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158ES | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Gray | |
| 0367159ES | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158DS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Dark Brown | |
| 0367159DS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158NS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Stone Gray | |
| 0367159NS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158RS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Redwood | |
| 0367159RS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158SS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Sand | |
| 0367159SS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158TS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Tan | |
| 0367159TS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158WS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Winchester | |
| 0367159WS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158GS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Dark Gray | |
| 0367159GS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158S | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Bright | |
| 0367159S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158FS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Beach Sand | |
| 0367159FS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158HS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Beach Gray | |
| 0367159HS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367168KS | 2-¾ in (70 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Black | |
| 0367169KS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |

For more information on coatings, go to pg. 64

TRIM SCREWS

- For exterior deck, trim, and finish applications with wood and PVC
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in green PROTECH coating to blend into wood surfaces, bright 305 and 316 Stainless Steel, and painted 316 Stainless Steel

PROTECH® COATED Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | HEAD |
|---------|-------------------------|------|------------|------------|------|
| 0346100 | 1-5/8 in (41.3 mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346104 | | 350 | 1 - T-15 | 4 | |
| 0346130 | 2 in (50.8 mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346134 | | 350 | 1 - T-15 | 4 | |
| 0346150 | 2-1/2 in (63.5 mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346154 | | 350 | 1 - T-15 | 4 | |
| 0346159 | | 1750 | 1 - T-15 | 1 | |
| 0346170 | 3 in (76.2 mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346174 | | 350 | 1 - T-15 | 4 | |
| 0346190 | 3-1/2 in (88.9 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0346194 | | 350 | 1 - T-15 | 4 | |

410 STAINLESS STEEL - BLACK Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|----------|-------------------------|-----|------------|------------|
| 3332140B | 2-1/4 in (41.3 mm) x #7 | 100 | 1 - T-15 | 12 |
| 3332144B | | 350 | 1 - T-15 | 4 |

For more information on coatings, go to pg. 64

305 STAINLESS STEEL

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|-------------------------|-----|------------|------------|
| 0350100 | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350104 | | 350 | 1 - T-15 | 4 |
| 0350130 | 2 in (50.8 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350134 | | 350 | 1 - T-15 | 4 |
| 0350150 | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350154 | | 350 | 1 - T-15 | 4 |
| 0350170 | 3 in (76.2 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350174 | | 350 | 1 - T-15 | 4 |

316 STAINLESS STEEL MARINE GRADE

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | HEAD |
|----------|-------------------------|-----|------------|------------|------|
| 0350100S | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350104S | | 350 | 1 - T-15 | 4 | |
| 0350130S | 2 in (50.8 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350134S | | 350 | 1 - T-15 | 4 | |
| 0350150S | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350154S | | 350 | 1 - T-15 | 4 | |
| 0350170S | 3 in (76.2 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350174S | | 350 | 1 - T-15 | 4 | |
| 0350190S | 3-1/2 in (88.9 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350194S | | 350 | 1 - T-15 | 4 | |

For more information on coatings, go to pg. 64






316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws



COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|-------------------------|-----|------------|------------|------------|---|
| 0353000ES | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Gray |  |
| 0353004ES | | 350 | 1 - T-15 | 4 | | |
| 0353050ES | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054ES | | 350 | 1 - T-15 | 4 | | |
| 0353000RS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Redwood |  |
| 0353004RS | | 350 | 1 - T-15 | 4 | | |
| 0353050RS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054RS | | 350 | 1 - T-15 | 4 | | |
| 0353000WS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Winchester |  |
| 0353004WS | | 350 | 1 - T-15 | 4 | | |
| 0353050WS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054WS | | 350 | 1 - T-15 | 4 | | |
| 0353000NS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Stone Gray |  |
| 0353004NS | | 350 | 1 - T-15 | 4 | | |
| 0353050NS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054NS | | 350 | 1 - T-15 | 4 | | |
| 0353059NS | | | | 2 - T-15 | | |
| 0353000GS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Dark Gray |  |
| 0353004GS | | 350 | 1 - T-15 | 4 | | |
| 0353050GS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054GS | | 350 | 1 - T-15 | 4 | | |

For more information on coatings, go to pg. 64

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws



COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|-------------------------|-----|------------|------------|------------|--|
| 0353000SS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Sand | |
| 0353004SS | | 350 | 1 - T-15 | 4 | | |
| 0353050SS | 2-1/2 in (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054SS | | 350 | 1 - T-15 | 4 | | |
| 0353000DS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Dark Brown | |
| 0353004DS | | 350 | 1 - T-15 | 4 | | |
| 0353050DS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353000CS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Cedar | |
| 0353004CS | | 350 | 1 - T-15 | 4 | | |
| 0353050CS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054CS | | 350 | 1 - T-15 | 4 | | |
| 0353100S | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | White | |
| 0353104S | | 350 | 1 - T-15 | 4 | | |
| 0353150S | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353154S | | 350 | 1 - T-15 | 4 | | |
| 0353000BS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Brown | |
| 0353004BS | | 350 | 1 - T-15 | 4 | | |
| 0353050BS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054BS | | 350 | 1 - T-15 | 4 | | |
| 0353000TS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Tan | |
| 0353004TS | | 350 | 1 - T-15 | 4 | | |
| 0353050TS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054TS | | 350 | 1 - T-15 | 4 | | |

For more information on coatings, go to pg. 64






STRUCTURAL SCREWS

CAMO offers a full line of high-performing, code-compliant structural screws for all your deck and framing needs. They are engineered to start fast, drive smooth, and hold strong. No pre-drilling required. Features our industry-leading propriety coating* for superior corrosion resistance.


RECOMENDED USE

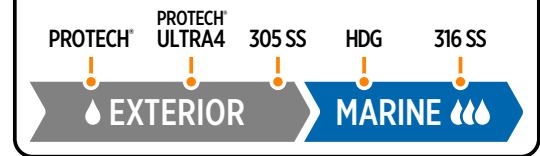

CAN BE USED FOR INTERIOR APPLICATIONS

[See pg. 64 for more information](#)

DESIGN FEATURES

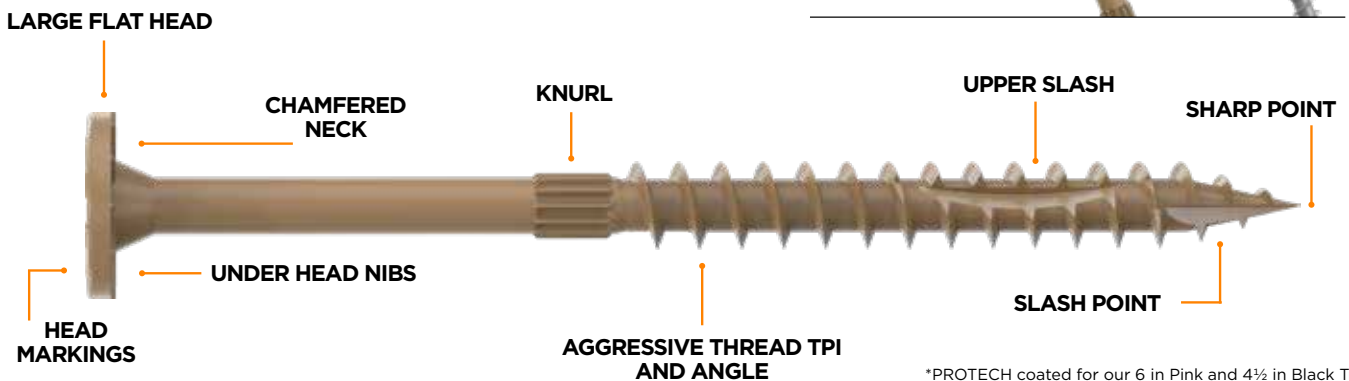

PROTECH[®] ULTRA 4

- TAN
- BLACK




*PROTECH coated for our 6 in Pink and 4½ in Black Truss Screws

CODE COMPLIANT

Our structural screws have been third-party tested, audited, and certified as IBC and IRC code-compliant by Dr J Engineering

- Our line covers all popular interior and exterior structural applications
- Engineered to start fast, drive smooth, and hold strong - no pre-drilling required
- Rigorously tested and approved for use with pressure-treated lumber
- IRC and IBC code compliant, State of Florida FL 41741
- Available in corrosion-resistant Hot Dip Galvanized, PROTECH® and PROTECH® Ultra 4 Coating

LEARN MORE ABOUT OUR STRUCTURAL SCREWS



IRC/IBC
CODE-COMPLIANT



CODE COMPLIANT APPLICATIONS



TRUSS



LEDGER



MULTI-PLY



FRAMING

GENERAL CONSTRUCTION APPLICATIONS



DECK BLOCKING



POSTS



STRUCTURES







LANDSCAPING



GENERAL CONSTRUCTION

RECOMMENDED APPLICATIONS



|  <p>TRUSS</p> |  <p>MULTI-PLY + LEDGER</p> |  <p>FRAMING</p> |  <p>MULTI-PURPOSE</p> |
|--|--|---|--|
| <ul style="list-style-type: none"> • Double top plate to truss or rafter • Stud to double top plate • Bottom plate to rim board • Beams to joist | <ul style="list-style-type: none"> • Multi-ply wood headers and beams • Deck posts, beams, and handrails • Interior and exterior ledger boards • General construction projects | <ul style="list-style-type: none"> • Wood-to-wood framing connections • Deck blocking • Interior and exterior projects | <ul style="list-style-type: none"> • Garden and landscaping projects • Deck posts, beams, and handrails • General construction projects |

TRUSS SCREWS (GUIDE INCLUDED)



- Code listed per DrJ TER No. 2102-01 and 2102-03 and State of Florida FL 41741
- For truss and rafter to top plate, stud to top plate, and deck joist to beam connections
- Replaces hurricane ties
- Fully threaded for maximum holding power
- Cylinder head easily countersinks for flush studs
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-30 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Includes easy-to-use truss screw guide
- CAMO® PROTECH® and PROTECH® ULTRA 4 coating
- For interior and exterior use




| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR |
|----------|-------------------------------------|-----|------------|------------|--|
| 0372244 | 6 in (152.4 mm) x 0.155 in (3.9 mm) | 50 | 1 - T-30 | 4 | Tan  |
| 0372249 | | 500 | 1 - T-30 | 1 | |
| 0372544* | 6 in (152.4 mm) x 0.155 in (3.9 mm) | 50 | 1 - T-30 | 4 | Pink  |
| 0372549* | | 500 | 1 - T-30 | 1 | |

NEW



- Code listed per DrJ TER No. 2102-01 and 2102-03 and State of Florida FL 41741
- For stud to bottom plate connections over masonry or concrete, and sole plate to rim board connections.
- Fully threaded for maximum holding power
- Cylinder head easily countersinks for flush studs
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-30 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® coating
- For interior and exterior use

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR |
|---------|--------------------------------------|-----|------------|------------|---|
| 0372724 | 4½ in (114.3 mm) x 0.155 in (3.9 mm) | 50 | 1 - T-30 | 12 | Black  |
| 0372729 | | 500 | 1 - T-30 | 1 | |

NEW

*Hi-Vis Truss Screws are PROTECH coated.

TRUSS GUIDE

Fasten at the right angle every time with our hands-free truss guide, included in every pail.



DOUBLE TOP PLATE TO TRUSS



DOUBLE TOP PLATE TO TRUSS



BEAM TO TRUSS



BEAM TO JOIST



STUD TO DOUBLE TOP PLATE



BOTTOM PLATE TO RIM BOARD



STUD TO BOTTOM PLATE



BOTTOM PLATE TO FLOOR JOIST

For the Black Truss Screw

FRAMING SCREWS



- Code listed per DrJ TER No. 2102-01 and State of Florida FL 41741
- For wood-to-wood framing connections, deck blocking, interior and exterior projects
- Replaces 8d, 10d, and 16d nails in interior and exterior framing applications
- Straight knurl reduces driving torque
- 6 nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® ULTRA 4 coating



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|---------------------------------------|------|------------|------------|
| 0355150 | 2-½ in (63.5 mm) x 0.160 in (4.06 mm) | 50 | 1 - T-25 | 12 |
| 0355154 | | 150 | 1 - T-25 | 4 |
| 0355159 | | 1000 | 2 - T-25 | 1 |
| 0355170 | 3 in (76.2 mm) x 0.160 in (4.06 mm) | 50 | 1 - T-25 | 12 |
| 0355174 | | 150 | 1 - T-25 | 4 |
| 0355179 | | 1000 | 2 - T-25 | 1 |

5/16 In LEDGER + MULTI-PLY SCREWS



- Code listed per DrJ TER No. 2102-01, 2102-02, 2102-04, 2404-04 and State of Florida FL 41741
- Replaces nailing patterns that do not always draw the wood together and 1/2 in lag screws in general construction projects
- Straight knurl reduces driving torque
- Nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-40 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® ULTRA 4 coating
- Interior and exterior use



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | APPLICATION |
|---------|--|-----|------------|------------|--------------------|
| 0366180 | 2-7/8 in (73 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366184 | | 50 | 1 - T-40 | 4 | |
| 0366189 | | 250 | 2 - T-40 | 1 | |
| 0366190 | 3-1/2 in (88.9 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 | Ledger + Multi-Ply |
| 0366194 | | 50 | 1 - T-40 | 4 | |
| 0366199 | | 250 | 2 - T-40 | 1 | |
| 0366200 | 4 in (101.6 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 | Ledger + Multi-Ply |
| 0366204 | | 50 | 1 - T-40 | 4 | |
| 0366209 | | 250 | 2 - T-40 | 1 | |
| 0366210 | 4-1/2 in (114.3 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366214 | | 50 | 1 - T-40 | 4 | |
| 0366219 | | 250 | 2 - T-40 | 1 | |
| 0366220 | 5 in (127 mm) x 5/16 in (7.9mm) | 10 | 1 - T-40 | 8 | Ledger + Multi-Ply |
| 0366224 | | 50 | 1 - T-40 | 4 | |
| 0366229 | | 250 | 2 - T-40 | 1 | |
| 0366240 | 6 in (152.4 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366244 | | 50 | 1 - T-40 | 2 | |
| 0366249 | | 250 | 2 - T-40 | 1 | |
| 0366250 | 6-3/4 in (171.5 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366254 | | 50 | 1 - T-40 | 2 | |
| 0366259 | | 250 | 2 - T-40 | 1 | |

5/16 in Flat Head Screws available in 8" and 10" lengths for Multi-Purpose applications - see p. 45

MULTI-PURPOSE FLAT HEAD SCREWS

- Code listed per DrJ TER No. 2102-01, 2404-04 and State of Florida FL 41741
- For deck posts, beams, and general construction projects
- Replaces traditional lag screws and through-bolts
- Straight knurl reduces driving torque
- Nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® 4 coating
- For interior and exterior use



5/16 In MULTI-PURPOSE FLAT HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|------------|------------|
| 0366260 | 8 in (203.2 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 10 |
| 0366264 | | 50 | 1 - T-40 | 2 |
| 0366269 | | 250 | 2 - T-40 | 1 |
| 0366270 | 10 in (254 mm) x 5/16 in (7.9 mm) | 10 | 1 - T-40 | 8 |
| 0366274 | | 50 | 1 - T-40 | 2 |
| 0366279 | | 250 | 2 - T-40 | 1 |

1/4 In MULTI-PURPOSE FLAT HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|------------|------------|
| 0360170 | 3 in (76.2mm) x 1/4 in (6.35 mm) | 10 | 1 - T-30 | 8 |
| 0360174 | | 50 | 1 - T-30 | 4 |
| 0360179 | | 500 | 2 - T-30 | 1 |
| 0360200 | 4 in (101.6 mm) x 1/4 in (6.35 mm) | 10 | 1 - T-30 | 8 |
| 0360204 | | 50 | 1 - T-30 | 4 |
| 0360209 | | 250 | 2 - T-30 | 1 |
| 0360240 | 6 in (152.4 mm) x 1/4 in (6.35 mm) | 10 | 1 - T-30 | 8 |
| 0360244 | | 50 | 1 - T-30 | 2 |
| 0360249 | | 250 | 2 - T-30 | 1 |
| 0360260 | 8 in (203.2 mm) x 1/4 in (6.35 mm) | 10 | 1 - T-30 | 8 |
| 0360264 | | 50 | 1 - T-30 | 2 |
| 0360269 | | 250 | 2 - T-30 | 1 |
| 0360270 | 10 in (254 mm) x 1/4 in (6.35 mm) | 10 | 1 - T-30 | 8 |
| 0360274 | | 50 | 1 - T-30 | 2 |
| 0360279 | | 250 | 2 - T-30 | 1 |

MULTI-PURPOSE HEX HEAD SCREWS

- Code listed per DrJ TER No. 2102-01 and State of Florida FL 41741
- For deck posts, beams, and general construction projects
- Slashes for reduced splitting
- Sharp point starts fast with no pre-drilling, reducing drive time
- Hex head with washer locks into a hex driver
- Straight knurl reduces driving torque
- Replaces lag screws
- Available in Hot-Dip Galvanized and CAMO® PROTECH® ULTRA 4 coating

PROTECH ULTRA 4

5/16 in HEAVY DUTY MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|-------------------------------------|-----|-------------|------------|
| 0365260 | 8 in (203.2 mm) x 5/16 in (7.9mm) | 10 | 7/16 in Hex | 8 |
| 0365264 | | 50 | 7/16 in Hex | 2 |
| 0365269 | | 250 | 7/16 in Hex | 1 |
| 0365270 | 10 in (254 mm) x 5/16 in (7.9 mm) | 10 | 7/16 in Hex | 8 |
| 0365274 | | 50 | 7/16 in Hex | 2 |
| 0365279 | | 250 | 7/16 in Hex | 1 |
| 0365280 | 12 in (304.8 mm) x 5/16 in (7.9 mm) | 10 | 7/16 in Hex | 6 |
| 0365284 | | 50 | 7/16 in Hex | 2 |

PROTECH ULTRA 4

1/4 in MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|-------------------------------------|-----|------------|------------|
| 0364090 | 1-½ in (38.1 mm) x 1/4 in (6.35 mm) | 25 | 3/8 in Hex | 8 |
| 0364094 | | 250 | 3/8 in Hex | 4 |
| 0364170 | 3 in (76.2 mm) x 1/4 in (6.35 mm) | 10 | 3/8 in Hex | 8 |
| 0364174 | | 50 | 3/8 in Hex | 4 |
| 0364179 | | 500 | 3/8 in Hex | 1 |
| 0364200 | 4 in (101.6 mm) x 1/4 in (6.35 mm) | 10 | 3/8 in Hex | 8 |
| 0364204 | | 50 | 3/8 in Hex | 4 |
| 0364209 | | 250 | 3/8 in Hex | 1 |
| 0364240 | 6 in (152.4 mm) x 1/4 in (6.35 mm) | 10 | 3/8 in Hex | 8 |
| 0364244 | | 50 | 3/8 in Hex | 2 |
| 0364249 | | 250 | 3/8 in Hex | 1 |

HOT-DIP GALVANIZED

5/16 in HEAVY DUTY MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|-------------|------------|
| 0369260 | 8 in (203.2 mm) x 5/16 in (7.9 mm) | 10 | 7/16 in Hex | 8 |
| 0369264 | | 50 | 7/16 in Hex | 2 |
| 0369269 | | 250 | 7/16 in Hex | 1 |
| 0369270 | 10 in (254 mm) x 5/16 in (7.9 mm) | 10 | 7/16 in Hex | 8 |
| 0369274 | | 50 | 7/16 in Hex | 2 |
| 0369279 | | 250 | 7/16 in Hex | 1 |

HOT-DIP GALVANIZED

1/4 in MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|------------|------------|
| 0368200 | 4 in (101.6 mm) x 1/4 in (6.35 mm) | 10 | 3/8 in Hex | 8 |
| 0368204 | | 50 | 3/8 in Hex | 4 |
| 0368209 | | 250 | 3/8 in Hex | 1 |
| 0368240 | 6 in (152.4 mm) x 1/4 in (6.35 mm) | 10 | 3/8 in Hex | 8 |
| 0368244 | | 50 | 3/8 in Hex | 4 |
| 0368249 | | 250 | 3/8 in Hex | 1 |

EXTERIOR ACCESSORIES

POWER BITS



T-15



T-20



T-25



T-30



T-40

- Power bits come in each pail of exterior screws for convenience on the jobsite
- 2 in (50.8 mm) long
- Premium Star Drive power bit allows for better connections



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------------------|-----|------------|
| 0333900 | T-15 Star Drive Power Bit | 3 | 10 |
| 0333910 | T-20 Star Drive Power Bit | 3 | 10 |
| 0333920 | T-25 Star Drive Power Bit | 3 | 10 |
| 0333990 | T-30 Star Drive Power Bit | 3 | 10 |
| 0333930 | T-40 Star Drive Power Bit | 3 | 10 |






STAINLESS STEEL FASTENERS

CAMO® offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments. Our 305 Stainless Steel screws deliver an aesthetic finish and hold up in your connections, while 316 Marine Grade Stainless Steel fasteners offer ultimate protection against corrosion in coastal and agricultural environments.

CORROSION RESISTANCE METER

While our PROTECH coating offers good resistance against mild corrosion, 305 and 316 Stainless Steel* are the best alloys to build with in corrosive areas.

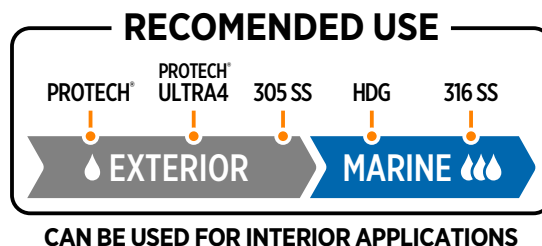

[See p. 64 for more information](#)

* Stainless steel is not corrosion-proof; it is corrosion-resistant and staining can still occur. It is important to regularly wash the installed screws to keep the heads and screw recesses clean from salt deposits and other residue.








305 STAINLESS STEEL

- Exterior structures outside of 3,000 ft. from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- Any outdoor project that you want to protect against potential corrosion

316 STAINLESS STEEL

- Coastal, marine, or waterway areas within 3,000 ft of saltwater
- Structures exposed to chlorine, wood strippers, or ice-melting chemicals
- Agricultural environments that deal with chemicals, pesticides, and treatments
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining

RECOMMENDED APPLICATIONS FOR EACH FASTENER:

| | | | |
|--|---|---|--|
| <p>DECK</p>  <ul style="list-style-type: none"> • Wood decking projects • Fences • Any exterior wood-to-wood connection | <p>COMPOSITE</p>  <ul style="list-style-type: none"> • Composite decking projects • PVC decking projects | <p>EDGE</p>  <ul style="list-style-type: none"> • Fasten any square edge deck board through the edge of the board using the MARKSMAN PRO® tools | |
| <p>TRIM</p>  <ul style="list-style-type: none"> • Decking • Exterior trim • Deck rails • Balusters • Fences | <p>HAND DRIVE NAILS</p>  <ul style="list-style-type: none"> • Decking • Wood-to-wood connections • Joist hangers | <p>COLLATED NAILS</p>  <ul style="list-style-type: none"> • Framing • General construction • Decks and fences • Metal joist hangers | |
| <p>316SS WEDGE™ CLIP</p>  <ul style="list-style-type: none"> • Any deck pattern on wood joists | | | |

UNIVERSAL DECK CLIPS

WEDGECLIP™



- Any deck pattern on wood joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Use with grooved composite, PVC and hardwood boards
- Clip body creates 3/16 in (4.7 mm) spacing
- Gusset holds boards down
- 316 stainless gusset, 316 stainless screw, nylon plastic spacer body
- Fasten with included • NEVER-MISS® Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE.

| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--|-----|-----------------------------------|------------|------------|
| 0344654S | WEDGE Clip - Any Deck Pattern on Wood Joists | 90 | 50 sq ft (4.64 m ²) | 1 - T-15 | 8 |
| 0344659S | | 450 | 250 sq ft (23.22 m ²) | 2 - T-15 | 1 |
| 0344656S | | 900 | 500 sq ft (46.45 m ²) | 2 - T-15 | 1 |

DECK SCREWS

- For fastening wood decking and other wood-to-wood connections in corrosive environments
- Type 17 slash point starts fast with no pre-drilling, reducing drive time
- Buglehead draws board tight, increasing pull-down strength
- 2/3 thread design offers premium holding power
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in 305 Stainless Steel and 316 Stainless Steel

305 STAINLESS STEEL

Buglehead Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|-------------------------|------|-----------------------------------|------------|------------|
| 0348100 | 1-5/8 in (41.3mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348104 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348109 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348130 | 2 in (50.8mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348134 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348139 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348150 | 2-1/2 in (63.5mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348154 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348159 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348170 | 3 in (76.2mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348174 | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348179 | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348190 | 3-1/2 in (88.9mm) x #10 | 50 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348194 | | 250 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348199 | | 1350 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348200 | 4 in (101.6mm) x #10 | 50 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348204 | | 250 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348209 | | 1350 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |

316 STAINLESS STEEL MARINE GRADE

Buglehead Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--------------------------|------|-----------------------------------|------------|------------|
| 0348100S | 1-5/8 in (41.3 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348104S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348130S | 2 in (50.8 mm) x #8 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348134S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348139S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348150S | 2-1/2 in (63.5 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348154S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348159S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348170S | 3 in (76.2 mm) x #10 | 100 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348174S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348179S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |
| 0348190S | 3-1/2 in (88.9 mm) x #10 | 50 | 30 sq ft (2.79 m ²) | 1 - T-25 | 12 |
| 0348194S | | 250 | 100 sq ft (9.29 m ²) | 1 - T-25 | 4 |
| 0348199S | | 1350 | 500 sq ft (46.45 m ²) | 2 - T-25 | 1 |

COMPOSITE SCREWS

- Color-matched screws for securing composite and PVC decking in highly corrosive environments
- Double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming
- Reverse thread at top increases pull-down power
- Cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear



COLOR MATCHER











Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

316 STAINLESS STEEL MARINE GRADE

Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|------------------------|------|-----------------------------------|------------|------------|------------|--|
| 0367158BS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Brown | |
| 0367159BS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158CS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Cedar | |
| 0367159CS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158ES | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Gray | |
| 0367159ES | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158DS | 2-½ in (63.5mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Dark Brown | |
| 0367159DS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |

| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|------------------------|------|-----------------------------------|------------|------------|------------|---|
| 0367158NS | 2-½ in (63.5mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Stone Gray |  |
| 0367159NS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158RS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Redwood |  |
| 0367159RS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158SS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Sand |  |
| 0367159SS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158TS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Tan |  |
| 0367159TS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158WS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Winchester |  |
| 0367159WS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158GS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Dark Gray |  |
| 0367159GS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158S | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Bright |  |
| 0367159S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158FS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Beach Sand |  |
| 0367159FS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367158HS | 2-½ in (63.5 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Beach Gray |  |
| 0367159HS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |
| 0367168KS | 2-¾ in (70 mm) x #10 | 350 | 100 sq ft (9.29 m ²) | 1 - T-20 | 4 | Black |  |
| 0367169KS | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-20 | 1 | | |

305 STAINLESS STEEL

Bright Collated Face Screws for Composite

- For exclusive use with the CAMO® **DRIVE** Tool



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------|------|------------|------------|
| 0395080 | 2-½ in (63.5 mm) x #10 | 1000 | 2 - T-20 | 1 |

EDGE SCREWS

- Fastens all square edge deck boards: pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Patented rake tip augers material out as they're driven, reducing the potential for splitting and cracking*
- Trimhead reduces visibility on the edge of the board
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws

*Pre-drilling is required for hardwoods and capped composites

316 STAINLESS STEEL MARINE GRADE Edge Screws

- For exclusive use with CAMO[®] **MARKSMAN PRO** Tools



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|-------------------------|------|-----------------------------------|------------|------------|
| 0345220S | 1-7/8 in (47.6 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | -- | 12 |
| 0345228S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-15 | 12 |
| 0345224S | | 700 | 200 sq ft (18.58 m ²) | 2 - T-15 | 4 |
| 0345219S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-15 | 1 |
| 0345240S | 2-3/8 in (60.3 mm) x #7 | 100 | 30 sq ft (2.79 m ²) | -- | 12 |
| 0345248S | | 350 | 100 sq ft (9.29 m ²) | 1 - T-15 | 12 |
| 0345244S | | 700 | 200 sq ft (18.58 m ²) | 2 - T-15 | 4 |
| 0345239S | | 1750 | 500 sq ft (46.45 m ²) | 2 - T-15 | 1 |

316 STAINLESS STEEL MARINE GRADE Collated Edge Screws

- For exclusive use with the CAMO[®] **DRIVE** Tool



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|-------------------------|------|----------------------------------|------------|------------|
| 0395020S | 2-3/8 in (60.3 mm) x #7 | 1000 | 285 sq ft (26.5 m ²) | 2 - T-15 | 1 |

TRIM SCREWS

- For fastening wood and PVC deck trim and finish applications in corrosive environments
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in Bright 305 Stainless Steel, Bright 316 Stainless Steel, and Painted 316 Stainless Steel

305 STAINLESS STEEL

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|-------------------------|-----|------------|------------|
| 0350100 | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350104 | | 350 | 1 - T-15 | 4 |
| 0350130 | 2 in (50.8 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350134 | | 350 | 1 - T-15 | 4 |
| 0350150 | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350154 | | 350 | 1 - T-15 | 4 |
| 0350170 | 3 in (76.2 mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350174 | | 350 | 1 - T-15 | 4 |

316 STAINLESS STEEL MARINE GRADE

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | HEAD |
|----------|-------------------------|-----|------------|------------|------|
| 0350100S | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350104S | | 350 | 1 - T-15 | 4 | |
| 0350130S | 2 in (50.8 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350134S | | 350 | 1 - T-15 | 4 | |
| 0350150S | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350154S | | 350 | 1 - T-15 | 4 | |
| 0350170S | 3 in (76.2 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350174S | | 350 | 1 - T-15 | 4 | |
| 0350190S | 3-1/2 in (88.9 mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350194S | | 350 | 1 - T-15 | 4 | |

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws








COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | | COLOR |
|-----------|-------------------------|-----|------------|------------|------------|---|
| 0353000ES | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Gray |  |
| 0353004ES | | 350 | 1 - T-15 | 4 | | |
| 0353050ES | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054ES | | 350 | 1 - T-15 | 4 | | |
| 0353000RS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Redwood |  |
| 0353004RS | | 350 | 1 - T-15 | 4 | | |
| 0353050RS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054RS | | 350 | 1 - T-15 | 4 | | |
| 0353000WS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Winchester |  |
| 0353004WS | | 350 | 1 - T-15 | 4 | | |
| 0353050WS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054WS | | 350 | 1 - T-15 | 4 | | |
| 0353000NS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Stone Gray |  |
| 0353004NS | | 350 | 1 - T-15 | 4 | | |
| 0353050NS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054NS | | 350 | 1 - T-15 | 4 | | |
| 0353000GS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Dark Gray |  |
| 0353004GS | | 350 | 1 - T-15 | 4 | | |
| 0353050GS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054GS | | 350 | 1 - T-15 | 4 | | |

316 STAINLESS STEEL MARINE GRADE - PAINTED







Trim Screws



COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|-------------------------|-----|------------|------------|------------|---|
| 0353000SS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Sand |  |
| 0353004SS | | 350 | 1 - T-15 | 4 | | |
| 0353050SS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054SS | | 350 | 1 - T-15 | 4 | | |
| 0353000DS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Dark Brown |  |
| 0353004DS | | 350 | 1 - T-15 | 4 | | |
| 0353050DS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054DS | | 350 | 1 - T-15 | 4 | | |
| 0353000CS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Cedar |  |
| 0353004CS | | 350 | 1 - T-15 | 4 | | |
| 0353050CS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054CS | | 350 | 1 - T-15 | 4 | | |
| 0353100S | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | White |  |
| 0353104S | | 350 | 1 - T-15 | 4 | | |
| 0353150S | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353154S | | 350 | 1 - T-15 | 4 | | |
| 0353000BS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Brown |  |
| 0353004BS | | 350 | 1 - T-15 | 4 | | |
| 0353050BS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054BS | | 350 | 1 - T-15 | 4 | | |
| 0353000TS | 1-5/8 in (41.3 mm) x #8 | 100 | 1 - T-15 | 12 | Tan |  |
| 0353004TS | | 350 | 1 - T-15 | 4 | | |
| 0353050TS | 2-1/2 in (63.5 mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054TS | | 350 | 1 - T-15 | 4 | | |

POWER BITS



T-15



T-20



T-25

- Power bits come in each pail of exterior screws for convenience on the jobsite.
- 2 in (50.8 mm) long
- Premium Star Drive power bit allows for better connections



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------------------|-----|------------|
| 0333900 | T-15 Star Drive Power Bit | 3 | 10 |
| 0333910 | T-20 Star Drive Power Bit | 3 | 10 |
| 0333920 | T-25 Star Drive Power Bit | 3 | 10 |

HAND DRIVE NAILS

316 STAINLESS STEEL MARINE GRADE

Ring Shank Deck Nails



- For fastening wood patios and decks and other exterior wood-to-wood connections in corrosive environments
- Diamond point starts easily
- Ring shank offers superior holding power and withdrawal force
- Checkered flat head provides a large striking surface, reducing hammer slippage for easy drive connection



| SKU# | SIZE | QTY | SHANK | CT./MASTER |
|----------|------------------------|-------|-------|------------|
| 5246158S | 2-½ in (63.5 mm) x #8 | 1 lb | Ring | 4 |
| 5246155S | | 5 lb | Ring | 12 |
| 5246178S | 3 in (76.2 mm) x #10 | 1 lb | Ring | 12 |
| 5246175S | | 5 lb | Ring | 4 |
| 5246179S | | 25 lb | Ring | 4 |
| 5246188S | 3-¼ in (82.5 mm) x #12 | 1 lb | Ring | 12 |
| 5246185S | | 5 lb | Ring | 4 |
| 5246195S | 3-½ in (88.9 mm) x #16 | 5 lb | Ring | 12 |
| 5246199S | | 25 lb | Ring | 4 |

316 STAINLESS STEEL MARINE GRADE

Joist Hanger Nails



- For installing joist hangers to wood framing in corrosive environments
- Diamond point starts easily
- Smooth shank is fast and easy to drive
- Short, heavy gauge provides superior holding power
- Flat head provides a large striking surface for easy drive connection




| SKU# | SIZE | QTY | SHANK | CT./MASTER |
|----------|-----------------------|------|--------|------------|
| 5096095S | 1-½ in (38.1 mm) x #9 | 5 lb | Smooth | 4 |

COLLATED NAILS

316 STAINLESS STEEL MARINE GRADE

Collated Ring Shank Framing Nails
(21° Plastic Strip)

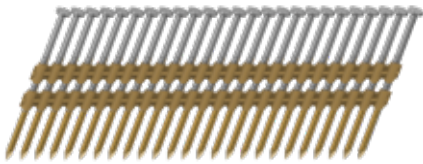

- For general construction, framing, deck, and fence building in corrosive environments
- Ring shank offers superior holding power and withdrawal force
- Round head provides greater resistance to pull out
- 21° plastic strip fits most 20°-22° framing nailers



| SKU# | SIZE | QTY | SHANK |
|----------|--|------|-------|
| 5710258S | 2- ³ / ₈ in (60.3 mm) x .113 | 1000 | Ring |
| 5710176S | 3 in (76.2 mm) x .120 | 1000 | Ring |
| 5710286S | 3- ¹ / ₄ in (82.5 mm) x .120 | 1000 | Ring |

316 STAINLESS STEEL MARINE GRADE

Collated Metal Hanger
Nails (31° Paper Strip)




- For metal connectors, joist hangers, joist ties, and hurricane straps in corrosive environments
- Smooth shank provides good holding power
- Round head provides greater resistance to pull out
- Metal hanger nail strip fits most 31° metal connector nailers



| SKU# | SIZE | QTY | SHANK |
|----------|--|------|--------|
| 5606090S | 1- ¹ / ₂ in (38.1 mm) x .148 | 1000 | Smooth |



WHAT CAMO FASTENERS ARE MADE OF

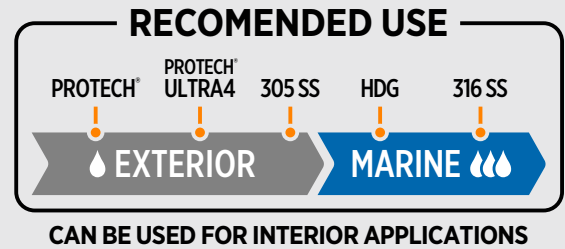

Building a deck, framing a house, or tackling any exterior project with CAMO fasteners means **building better**. CAMO fasteners start **fast**, create **strong connections**, and **hold up to the elements** over time, thanks to their coating and alloys.

Learn more about each option below so **you can be confident** you've got the right fastener for your project and gain **peace of mind** knowing that they are all **backed by a CAMO Warranty**.

PROTECH[®]



PROTECH is our proprietary coating for our steel screws. It is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements. Our PROTECH-coated fasteners are guaranteed against rust and corrosion for the life of your project so long as they are installed following CAMO recommendations.


PROTECH-COATED FASTENERS ARE SUITABLE IN MANY APPLICATIONS:

- Decks, patios, and structures in inland areas away from water
- Installations of pressure treated, PVC, composite, and capped composite boards
- Exterior projects in temperate climates that face typical weather events

PROTECH[®] ULTRA 4



Our proprietary PROTECH Ultra 4 four-layer coating system provides optimum corrosion resistance, UV and environmental protection, and torque reduction for a high-performing, long-lasting screw. Tested in accordance with ASTM G198, the coating meets or exceeds the protection of code-approved hot-dip galvanized (ASTM A153, Class D) in ground contact general use pressure treated lumber (AWPA UC1-UC4A). We test our coating 2X longer than industry standard requires, so you can be confident your connections will stand the test of time.

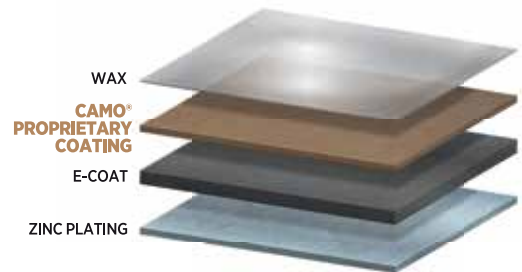

PROTECH ULTRA 4-COATED FASTENERS ARE SUITABLE IN MANY APPLICATIONS:

- For interior and exterior projects where corrosion resistance is key
- Structural projects that utilize a larger screw with a greater surface area, coming in contact with more wood
- Installations with ground contact general use pressure-treated lumber

305 STAINLESS STEEL*



If your project is outside of 3,000 feet from a saltwater shoreline, Stainless Steel fasteners are recommended, and CAMO 305 Stainless Steel fits the bill. 305 Stainless Steel offers better resistance against corrosion than a carbon coating and will keep your project safe and long-lasting while offering excellent aesthetics. Widely available across the country, 305 Stainless Steel is a great alloy option for installing pressure treated lumber, PVC, composite, and capped composite deck boards no matter where you are located.

305 STAINLESS STEEL IS GREAT FOR A VARIETY OF APPLICATIONS:

- Exterior structures 3000 feet to 10 miles from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- Any outdoor project that you want to protect against potential corrosion

HOT-DIP GALVANIZED



A small step under Stainless Steel in terms of corrosion protection, hot-dip galvanized coating is a viable and reliable option for various fasteners. The code-approved coating is tested to meet ASTM A153, Class D, and is approved for use in MCA ground contact pressure treated lumber.

The hot-dip galvanization process results in a thick coating that will wear over time but still offer excellent protection against corrosion for the lifetime of the exterior application. Additionally, the coating is applied uniformly, so your connections are completely protected.

HOT-DIP GALVANIZED COATING IS COMMONLY USED IN THE FOLLOWING APPLICATIONS:

- Exterior projects in temperate climates that you want to protect against the elements
- Structural projects that utilize larger screws with a greater surface area, coming in contact with more wood
- Coastal applications

316 STAINLESS STEEL*



316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas, so your build remains structurally sound and aesthetically pleasing.

Saltwater environments present an opportunity for severe rust and corrosion, so 316 Stainless Steel is required in any coastal, marine, or waterway area within 3,000 feet of saltwater. We also recommend using 316 Stainless Steel in structures within a 10-mile reach of saltwater, which are susceptible to increased corrosion rates as saltwater is aerosolized.

316 STAINLESS STEEL IS RECOMMENDED IN A VARIETY OF APPLICATIONS BEYOND SALTWATER EXPOSURE:

- Structures near swimming pools where the surface will be exposed to chlorine
- Agricultural environments that deal with chemicals, pesticides, and treatments
- Decks, patios, and structures that will face wood strippers or ice-melting chemicals
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining and streaking

* Stainless steel is not corrosion-proof; it is corrosion-resistant and staining can still occur. It is important to regularly wash the installed screws to keep the heads and screw recesses clean from salt deposits and other residue.

| FIND THE RIGHT CAMO [®] FASTENER BY STARTING WITH YOUR BOARDS | BOARD PROFILE | FASTENING METHOD | FASTENERS | | | | NEVER-MISS [®] Guide Included with 450 ct and 900 ct CAMO Clips | |
|--|---|----------------------|---|------------------------|-----------------------------------|-----------------------------------|---|---|
| | SQUARE EDGE GROOVED | EDGE CLIP FACE | EDGE (Collated and Hand Drive) COMPOSITE (Collated and Hand Drive) DECK (Hand Drive) WOOD (Collated) | UNIVERSAL DECK CLIPS | | | | |
| | | | | STARTER First Board | EDGE [®] 90° Patterns | WEDGE [™] Any Pattern | WEDGEMETAL [™] Any Pattern METAL JOISTS | |
| Pressure Treated Lumber (Wet) | SQUARE EDGE | EDGE | Collated Edge Screws • PROTECH or 316 Stainless Steel | | | | | |
| | | CLIP | Edge Screws • PROTECH or 316 Stainless Steel | | | | | |
| | | FACE | Collated Wood Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| | | | Deck Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| Pressure Treated Lumber (KDAT) | SQUARE EDGE | EDGE | Collated Edge Screws • PROTECH or 316 Stainless Steel | | | | | |
| | | CLIP | Edge Screws • PROTECH or 316 Stainless Steel | | | | | |
| | | FACE | Collated Wood Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| | | | Deck Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| Composite (Uncapped) | GROOVED | EDGE | STARTER Clips | | | | | |
| | | CLIP | EDGE Clips | | | | | ● |
| | | FACE | WEDGE Clips • 316 Stainless Steel | | | | | ● |
| | SQUARE EDGE | EDGE | WEDGEMETAL Clips | | | | | ● |
| | | CLIP | Collated Edge Screws • PROTECH or 316 Stainless Steel | | | | | |
| | | FACE | Edge Screws • PROTECH or 316 Stainless Steel | | | | | |
| Composite (capped) | GROOVED | EDGE | STARTER Clips | | | | | |
| | | CLIP | EDGE Clips | | | | | ● |
| | | FACE | WEDGE Clips • 316 Stainless Steel | | | | | ● |
| | SQUARE EDGE | EDGE | WEDGEMETAL Clips | | | | | ● |
| | | CLIP | Edge Screws • PROTECH or 316 Stainless Steel (Pre Drill required for this option.) | | | | | |
| | | FACE | Collated Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| PVC | GROOVED | EDGE | STARTER Clips | | | | | |
| | | CLIP | EDGE Clips | | | | | ● |
| | | FACE | WEDGE Clips • 316 Stainless Steel | | | | | ● |
| | SQUARE EDGE | EDGE | WEDGEMETAL Clips | | | | | ● |
| | | CLIP | Collated Edge Screws • 316 Stainless Steel | | | | | |
| | | FACE | Edge Screws • 316 Stainless Steel | | | | | |
| Cedar & Redwood | SQUARE EDGE | EDGE | Collated Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| | | CLIP | Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel | | | | | |
| | | FACE | Edge Screws • 316 Stainless Steel | | | | | |
| | | | Collated Edge Screws • 316 Stainless Steel | | | | | |
| Hardwood | GROOVED | EDGE | Deck Screws • 316 Stainless Steel | | | | | |
| | | CLIP | STARTER Clips | | | | | |
| | | FACE | EDGE Clips | | | | | ● |
| | SQUARE EDGE | EDGE | WEDGE Clips • 316 Stainless Steel | | | | | ● |
| | | CLIP | WEDGEMETAL [™] Clips | | | | | ● |
| | | FACE | Edge Screws • 316 Stainless Steel (Pre Drill required for this option.) | | | | | |
| | Deck Screws • 316 Stainless Steel (Pre Drill required for this option.) | | | | | | | |

CAMO[®]

The Better Way to Build a Deck

MICHIGAN

2964 Clydon Ave SW
Grand Rapids, MI 49519

NEW YORK

5985 Tarbell Rd
Syracuse, NY 13206

GEORGIA

555 Riverside Pkwy, Ste. 100
Austell, GA 30168

TEXAS

3701 Yale St
Houston, TX 77018

CALIFORNIA

3765 Channel Drive
West Sacramento, CA 95691

FOR MORE INFORMATION, PLEASE VISIT WWW.CAMOFASTENERS.COM OR CALL
800-968-6245 TO SPEAK WITH A CAMO PRODUCT EXPERT.